

## A Low Complexity Algorithm for Epileptic Seizure Detection using Statistical Moments and Support Vector Machines

Ahmad Mohammad Sarhan

College of Engineering and Technology, Computer Engineering, American University of the Middle East, Eqaila, Kuwait.

### Abstract

Epilepsy or seizure disorder is one of the most common neurological disorders. Epilepsy is characterized by unforeseeable seizures. The cause of these seizures is often totally unknown. Epileptic discharges normally appear on the Electroencephalogram (EEG) signal which represents the brain's electrical activities. EEG signal analysis is the standard approach used in the detection and prediction of epileptic seizures. A novel automated system for the identification of epilepsy patients and detection of seizures is proposed in this study. Statistical moments are used to reduce the dimension of the input EEG signal and to obtain distinctive features from it which are subsequently fed to a modified Support Vector Machine (SVM) algorithm for classification (epileptic or not epileptic). Experimental tests show that the standard deviation and mean values of the input EEG signal form robust features. Testing the performance of the proposed system on a publicly available epilepsy dataset provided by the University of Bonn, achieved 100% accuracy. The proposed system requires up to 83% fewer clock cycles than the lift algorithm and 88% fewer clock cycles than the convolution-based algorithm.

**Keywords:** Electroencephalogram (EEG), statistical moments, support vector machine (SVM), seizure detection, epilepsy, time complexity.

Received February 22, 2017; Revised March 29, 2017; Accepted April 16, 2017

\*Correspondence: Ahmad Mohammad Sarhan, Email [asarhan@hotmail.com](mailto:asarhan@hotmail.com), Contact: +966533626554

*To cite this manuscript:* Sarhan AM. A Low Complexity algorithm for epileptic seizure detection using statistical moments and support vector machines. Biomed Lett 2017; 3(2):79-86.

### Introduction

The Epilepsy or seizure disorder is one of the most common neurological disorders [1]. About 2% of the world's population are affected by epilepsy [2]. Epilepsy is characterized by unforeseeable seizures. The cause of these seizures may be related to a family trend or a brain injury but is often totally unknown [3]. If a person has one or more seizures, then that person is diagnosed with epilepsy unless the seizures are caused by some known medical conditions [4]. In other words, if a person has a seizure, it does not necessarily mean that he or she has epilepsy. Non-epileptic seizures may happen because of several reasons including brain tumors, stroke, head injury, and birth defects [5].


The electrical events that produce the symptoms of a seizure occur in the brain. Specifically, an excessive neuronal discharge and an unanticipated electrical disturbance of the brain cause the seizures [6]. The unpredictable nature of seizures will have a tremendous impact on the patient's quality of life [7,8]. Consequently, early detection of pre-seizure is a very important demand as it may allow the patient to take appropriate and in some cases life-saving precautions [9].

Electrical activities of the brain can be seen by the electroencephalogram (EEG) [10,11]. In addition to its various applications in the medical fields, the EEG is considered the most useful and significant test for checking if someone has epilepsy [12].

Recording of the EEG signal can be done either invasively or non-invasively [13]. In the non-invasive method, the EEG is directly recorded from the scalp. Here multiple-channel EEG signals are recorded simultaneously with electrodes placed on the scalp [14]. A gel is often applied in order to decrease the electrical resistance between the electrodes and the skin. Usually, 19 electrodes in addition to system reference and a ground are attached to the scalp and arranged in a specific order following the International 10-20 system [15]. **Figure 1** depicts the electrode locations of the International 10-20 system for EEG recording. Fewer electrodes are used when recording the EEG signal for a neonate.

The other type of EEG recording known as Intracranial Electroencephalography (iEEG), is invasive and is often captured during a surgery [17]. Here, electrodes are implanted on the exposed surface of the brain to record the EEG signal directly

from the cerebral cortex. Most of the research work in the field of seizure analysis is based on the scalp EEG recording method.

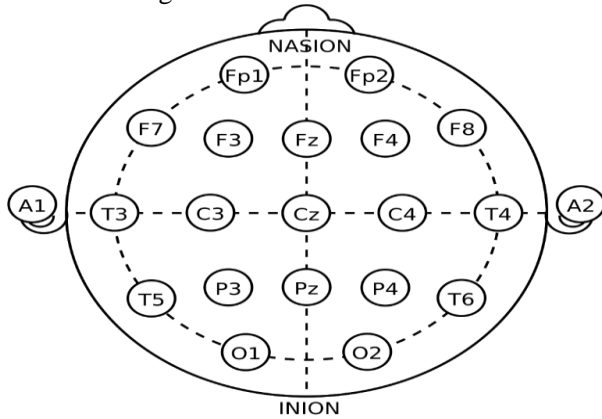


**Figure 1:** Electrode locations of International 10-20 system for EEG recording [16].

In the seizure analysis problem of epilepsy patients, the EEG signal is studied for the purpose of classifying the seizure and for the purpose of predicting epileptic activities before they occur. Visual inspection of EEG signals is a time-consuming process and is subject to a human interpretation which may lead to incorrect diagnosis due to various human-related factors such as fatigue. In this study, we propose a novel automated epilepsy detection system. Specifically, we use statistical

moments to infer discriminatory information about the input EEG signal which hopefully forms a valid representative feature vector. The input feature vector is then passed to Support Vector Machines (SVMs) for classification and labeling (epileptic or not epileptic). Testing the proposed system on an epilepsy dataset, obtained from the University of Bonn [18], achieved a 100% success rate. To prove the validity and robustness of the proposed scheme, a review of the accuracy rates of various methods employed in the literature is provided in this paper. The proposed system is proved through mathematical analysis to have a very low time complexity compared to the state-of-the-art methods in epilepsy detection.


## Materials and Methods

The raw EEG dataset used in this study is obtained from Bonn University and is publicly available for free download [19]. The entire database is composed of five sets, each of which contains 100 single-channel surface EEG signals of 23.6s. In our dataset, we adopted one healthy set (seizure-free recorded extracranially with eyes open) and one set containing ictal or seizure activity, recorded intracranially from a volunteer patient. Hence our dataset is composed of 200 samples. **Figure 2** shows samples from the used dataset of an epileptic and a seizure free recordings.

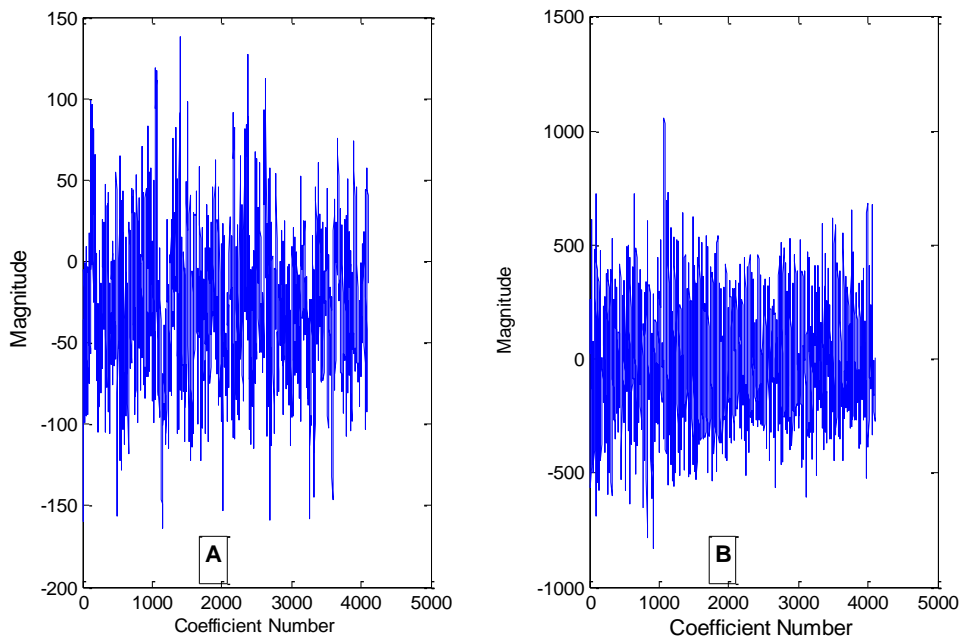


**Figure 2:** Examples of raw EEG recordings for (A): seizure-free and (B): seizure phases.

The x-axis and the y-axis in **Figure 2** represent the time period [0 to 23.6s] and the EEG signal value in microvolts, respectively. The raw EEG signals were recorded using a 128-channel amplifier system, band-pass filtered using a band-pass of [0.53–40] Hz, and then sampled at a rate of 173.61 Hz. A block diagram illustrating the stages of the proposed system is depicted in **Figure 3**. The statistical features (mean and standard deviation) extracted from the input EEG signal are fed directly to an SVM classifier.



**Figure 3:** Block diagram of the proposed system.

SVMs have supervised learning algorithms that are commonly used for classification and regression applications. An SVM, devised by Cortes et al. [20] is a wo-group classifier that has been used in recent years to efficiently solve linear and non-linear classification problems [21]. Although SVMs can be modified to handle multiclass problems [22], they were originally designed to classify data composed of exactly two classes. In our application, SVM is used to classify the EEG signal into either healthy or epileptic. As depicted in **Figure 4**, an SVM classifies data by determining the best hyperplane that isolates the data points of the two classes.

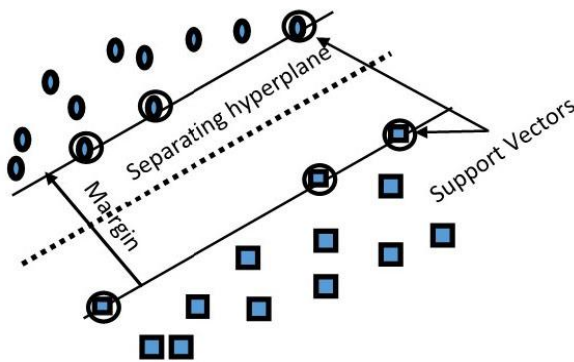

**Figure 4:** Support Vector Machine

In other words, an SVM tries to find the widest possible margin that separates the two classes and has no interior data points. The SVM algorithm implemented here uses the Gaussian kernel defined by:

$$k(\mathbf{x}, \mathbf{y}) = \exp\left(-\frac{\|\mathbf{x} - \mathbf{y}\|^2}{2\sigma^2}\right), \quad (1)$$

**Note:**  $\sigma$  is a user-defined variance parameter.

## Statistical analysis

As illustrated in **Figure 2**, the normal and seizure EEG samples exhibit different statistical characteristics. For example, the mean and standard deviation of the normal (healthy) sample is negative 28.4 and 42.1, respectively whereas the mean and standard deviation of the epileptic sample is 3.3 and 259.9, respectively. This acute variation in statistical properties is a prominent factor in the motivation to employ statistical moments to obtain distinctive features from the input EEG signal.

In this study, we explore the use of moments as valid features representing the input EEG signals. Moments are statistical measures that describe signal characteristics [23]. The first two moments in statistics are the mean and the variance which is the square of the standard deviation. These two moments are by far the most commonly used moments. The third and fourth moments are the skewness and the kurtosis, respectively. Higher-order moments (above the 4th moment) are not easily described or estimated [24]. Moments have found several practical applications in the field of digital signal processing (DSP) including pattern recognition, image encoding, and pose estimation. Sarhan et al. have used the standard deviation measure in the Arabic character recognition application [25]. Amr et al. have employed the moments in an image retrieval application [26]. Boveiri has discussed the use of statistical moments in pattern classifications [27]. Teh et al. have applied the moments in image analysis [28].

Let the input EEG signal  $x$  be defined as a discrete-time (DT) sequence of real numbers, such that

$$x = \{x_1, x_2, x_3, \dots, x_m\} \quad (2)$$

The first moment or the sample mean is widely used as a measure of central tendency and is affected by every sample in the signal. The mean is given by the following expression:

$$\bar{x} = \frac{\sum x_i}{m} \quad (3)$$

The Sample Variance measures the variability and is given by

$$s^2 = \frac{\sum (x_i - \bar{x})^2}{m - 1}$$

The Sample Variance measures the variability and is given by (4)

The sample Standard Deviation is defined as the square root of the variance or


$$s = \sqrt{s^2}$$

The Sample Standard Deviation is also given by the following expression

$$s = \sqrt{\frac{\sum x_i^2 - \frac{(\sum x_i)^2}{m}}{m-1}} \quad (5)$$

## Results

As commonly practiced in supervised machine-learning models, we used the Holdout Sample method for cross-validation. Specifically, the EEG data was randomly split into a training set and a testing set. When using only the standard deviation and the mean of the input samples as features, the proposed system produces a zero error rate. In the following experiment, we explore the performance of the system when the input EEG is contaminated with the additive white Gaussian noise of zero mean. Depicted in Figure 5 is the error rate of the proposed system as a function of the standard deviation of the noise. Fig.5 clearly illustrates that the proposed system is robust and produces a zero error rate for low levels of additive white Gaussian noise. Even for high levels of additive noise, the system's error rate is less than 12.5 %. Compared to the state-of-the-art methods in epilepsy feature extraction which were reviewed in this study, the proposed system is superior in terms of the accuracy rate and complexities.

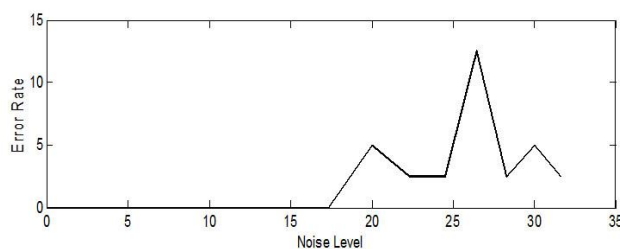

**Figure 5:** Error rate of the proposed system as a function of the noise standard deviation

## Discussion

Epilepsy is characterized by seizures and is highly unpredictable. A seizure may be epileptic or non-epileptic. EEG signal analysis is considered the standard approach used in the detection and prediction of epileptic seizures. Manually

determining the location of the seizure period in EEG signals is a tedious, time consuming, and difficult challenge. Consequently, there is a strong need for an automatic system for the detection and prediction of seizures in EEG recordings.

Classification of EEG signals or any signal in general consists of two major functions: feature extraction and class-labeling. The purpose of the feature extraction stage is to obtain finite characteristics that are representative of the input signal. This process often involves compression and redundancy removal. In the class-labeling stage, a classifier is used to operate on the extracted features of the input signal and assign the input to a particular class. Classification methods can be categorized into four kinds: machine learning techniques such as. Fuzzy Network, SVM, and artificial neural network (ANN); statistical methods such as Bayesian classification; logic-based techniques such as decision trees (DT); and instance-based methods such as the k-nearest neighbor (KNN) algorithm.

In the following survey, we aim to explore the various feature extraction and classification methods that are found in the literature of seizure detection. A recent review of signal processing techniques and classification methods in seizure analysis was performed by Bou Assis et al [29]. Alotaiby et al. categorized the EEG analysis methods into time-domain and frequency domain methods and provided a valuable survey of the EEG seizure detection and prediction algorithms [30]. Wei et al. used a time-domain method (shape similarity) for feature generation and the Hausdorff distance as a classifier to recognize epileptic discharges in EEG [31]. Patidar et al. worked on the diagnosis of epilepsy by extracting features using Kraskov entropy derived from Tunable Q-Factor Wavelet Transform (TQWT) and evaluated the system performance as a function of Q [32].

Jaiswal et al. used the Local Neighbor Descriptive Pattern (LNDP) and the One-dimensional Local Gradient Pattern (1D-LGP) techniques for feature extraction and passed the extracted features to an ANN classifier [33]. Li et al. used the dual-tree complex wavelet transform (DT-CWT) for feature extraction and SVM for classification [34]. Ekong et al. used a fuzzy SVM in the classification of epilepsy seizures [35]. Satapathy et al. used the radial basis function neural network (RBFNN) for epilepsy classification and the Daubechies wavelet at level four for extraction [36]. Riaz et al. employed the empirical mode decomposition (EMD) for extracting

features from EEG signals and used SVM for the classification phase [37].

A body-senor network (BSN) that used signal statistics such the mean, variance, zero-crossing rate, and entropy; was developed by Dalton et al. to monitor and detect epileptic seizures [38]. The use of the Principal Component Analysis (PCA) in the Wavelet domain was adopted by Xie et. al. for denoising and feature extraction [39]. A review of wavelet techniques for computer-aided seizure detection and epilepsy diagnosis was developed by Faust et al. [40]. Feature extraction using approximate entropy on DWT coefficients was used by Ocak [41] and by Guo et al. [42]. Chiu et al. extracted features from the EEG signal using Wavelet energy [43]. Line length feature was adopted by Guo et al. [44]. Subasi et al. extracted features by employing the PCA, Independent-Component Analysis (ICA) and Linear Discriminant Analysis (LDA) on DWT coefficients [45].

Next, we demonstrate that the proposed system outperforms the methods described in the literature of epilepsy analysis in terms of two main merit measures, accuracy, and complexity. First, as was just discussed in the literature review part of this paper, the accuracies of the epilepsy analysis methods are lower than the 100% accuracy rate achieved by the proposed system.

Second, we provide a time complexity comparison of the feature extraction stage of the proposed system and the methods introduced in the literature. There are two approaches for evaluating algorithm complexities [46]. The first method is based on analyzing the written algorithm to count the main operations [47]. The second method is based on running the algorithm on a PC to measure the time and memory costs. Of course, the latter method is not widely used as it is platform-dependent and the result will vary when the algorithm is run across different platforms.

The calculation cost in the feature extraction stage of the proposed system depends only on calculating the mean and the standard deviation of the input sequence.

**Postulate 1:** The time complexity  $T_m[n]$  for computing the mean function (Eq. 3) is given by:

$$T_m[n] = n+1 = O(n) \quad (6)$$

Where  $n$  is the length of the 1-D input sequence.

To calculate the time complexity  $T_s[n]$  for evaluating the standard deviation function, rewrite Eq.4 as:

$$s^2 = \frac{\sum (x_i - \bar{x})^2}{m-1} = \sum (x_i)^2 + \sum (\bar{x})^2 - \sum 2(x_i \bar{x})$$

Where the constant  $1/(m-1)$  has been neglected

**Postulate 2:** The time complexity  $T_s[n]$  for computing the variance function (Eq. 4) is given by:

$$T_s[n] = n^2 + n^2 + 2n = 2n^2 + 2n = O(n^2) \quad (7)$$

Thus the total time complexity of the proposed systems is

$$T[n] = T_s[n] + T_m[n] = 2n^2 + 2n + n + 1$$

$$T[n] = 2n^2 + 3n + 1 = O(n^2) + O(n) + O(1) = O(n^2) \quad (8)$$

To provide a clock cycle cost analysis, we assume that the input samples are stored as 16-bit fixed point numbers. Therefore, when the algorithms are implemented in a DSP microcontroller, the cycles per instruction cost are listed in **Table 1**.

**Table 1:** Cycles per operation for a 16-bit fixed point number

| Operation            | Number of cycles |
|----------------------|------------------|
| subtraction/addition | 1 clock cycle    |
| multiplication by 2  | 1 clock cycle    |
| Multiplication       | 10 clock cycles  |

The discrete wavelet transform of an input vector of length  $m$  returns a vector of length  $m$ , the same length as the input. It can be deduced from Eq. 8 that the proposed system will require the following operations to transform an  $m$ -sample signal:

**Postulate 3:** The number of operations required by the proposed system to transform an input sequence of length  $m$ :

$$\text{Total operations} = m \text{ multiplications} + 2m \text{ multiplication by a constant} + 3m \text{ additions} \quad (9)$$

Using Eq. 9 and **Table 1**, the number of clock cycles required by the proposed system is:

$C[m] = 10m + 2m + 3m$  cycles. Thus the number of cycles required by the proposed system to perform a WT of an  $m$ -sample input sequence is given by

$$C[m] = 15m \text{ clock cycles for an input sequence of } m \text{ samples.} \quad (10)$$

Next, we compare the time complexity of the proposed system with the Wavelets complexity as Wavelet is the most commonly used algorithm in the feature extraction stage of epilepsy analysis and is widely considered the state-of-the-art approach in this field. First, one disadvantage of using the Wavelet transform (WT) to perform compression is that it has a higher numerical cost compared to the other transforms such as the Discrete Cosine transform (DCT) and the Fourier transform (FT) [48,49]. WT is normally computed using lift algorithms [50, 51] or convolution-based algorithms [52].

Next, we provide the number of operations (additions, subtractions, and multiplications) that are needed by the lift and convolution-based algorithms to calculate the Daubechies (DB) WT. Here the algorithms are used to calculate a single step of DB-WT. A single step refers here to the calculation of

two output samples of a Wavelet transform based on two input samples. **Table 2** depicts the required operations of the lift-based and convolution-based algorithms, for evaluating the DB-WT.

It can be seen from **Table 2** that the lift and convolution-based algorithms, when transforming an m-sample sequence, require the following operations:

**Table 2:** Number of operations required to compute the Wavelet Transform

| Algorithm         | Multiplication | Multiplication 2 | Subtraction/addition |
|-------------------|----------------|------------------|----------------------|
| Lift-based        | 8              | 0                | 6                    |
| Convolution-based | 12             | 0                | 10                   |

Lift-based algorithm = 8m multiplications and 6m additions (11)

Convolution-based algorithm = 12m multiplications and 10m additions (12)

Using **Table 1**, the clock cycle costs of the Lift-based and Convolution-based algorithms are:

$C[m] = 86$  clock cycles Lift-based algorithm (13)

$C[m] = 130$  clock cycles convolution-based algorithm (13)

Assuming a 16-bit integer value the proposed system requires up to 83% fewer clock cycles than lift algorithm and 88% fewer clock cycles than a convolution-based algorithm.

## Conclusion

A novel approach to the detection of epileptic seizures in EEG signals is introduced in this study. The system is based on extracting statistical features

from the EEG signal and applying the features to an SVM for classification. Experimental tests showed that the standard deviation and mean values of the input EEG signal form robust features. Simulations showed that the proposed system achieved 0% error rate. The experiments also revealed that when EEG signals are corrupted with a high-level white Gaussian noise, the proposed system still achieves a small error rate of about 15%.

To show the validity of the proposed system, the performance of other systems proposed in the literature of EG analysis is discussed and the accuracies of other methods found in the literature are listed in **Table 3**. The main merits of the proposed systems are its low complexities and high accuracy compared to the state-of-the-art methods which were reviewed in this work. Assuming a 16-bit integer value the proposed system requires up to 83% fewer clock cycles than lift algorithm and 88% fewer clock cycles than a convolution-based algorithm.

**Table 3:** Accuracies of seizure classification methods proposed in the literature

| Methods                                                                                          | Authors                | % Accuracy |
|--------------------------------------------------------------------------------------------------|------------------------|------------|
| K-NN classifier and Wavelet features                                                             | Orhan et al. [48]      | 97         |
| K-NN classifier and Genetic Programming                                                          | Guo et al. [49]        | 93         |
| ANN and PCA                                                                                      | Dastidar et al. [50]   | 99         |
| Expert model and Wavelet transform                                                               | Ubeyli [51]            | 95         |
| Histograms and SVM                                                                               | Runarsson et. al. [52] | 90         |
| Gaussian mixture model and Wavelets                                                              | Chua et al [53]        | 93         |
| linear least squares models                                                                      | Zamir [54]             | 100        |
| wavelet based and statistical features                                                           | Ahammad [55]           | 84         |
| PCA and ANN                                                                                      | Tzallas et al.[56]     | 89         |
| phase space representation (PSR) for feature extraction and Least squares SVM for classification | Sharma et al.[57]      | 95         |
| LDA and SVM classifier                                                                           | Bashar et al.[58]      | 79.2       |
| Wavelets and nearest neighbor classifier                                                         | Chen et al. [59]       | 100        |

## References

- [1] National Institute of Neurological Disorders and Stroke (NINDS), [https://www.nih.gov/about-nih/what-we-do/nih-](https://www.nih.gov/about-nih/what-we-do/nih-almanac/national-institute-neurological-disorders-stroke-ninds) almanac/national-institute-neurological-disorders-stroke-ninds. Accessed Feb. 2017.
- [2] Bromfield EB, Cavazos JE, Sirven JI, editors. An Introduction to Epilepsy [Internet]. West Hartford(CT): American Epilepsy Society; 2006.



- [3] Kammerman, S., & Wasserman, L. (2001). Seizure disorders: Part 1. Classification and diagnosis. *The Western Journal of Medicine*, 175(2), 99–103.
- [4] Fisher RS, van Emde Boas W, Blume W, et al. Epileptic seizures and epilepsy: definitions proposed by the International League against Epilepsy (ILAE) and the International Bureau for Epilepsy (IBE). *Epilepsia*. 2005 Apr. 46(4):470-2.
- [5] Chadwick DW. Non-epileptic seizures. *Brain* 2000; 123 (9): 1973-1974.
- [6] Kramer MA, Cash SS. Epilepsy as a disorder of cortical network organization. *Neuroscientist*. 2012 Aug. 18(4):360-72.
- [7] Choi-Kwon, S., Chung, C., Kim, H., Lee, S., Yoon, S., Kho, H. et al, Factors affecting the quality of life in patients with epilepsy in Seoul, South Korea. *Acta Neurol Scand*. 2003; 108:428–434.
- [8] Kanner MK. Depression in epilepsy: a neurobiologic perspective. *Epilepsy Curr*. 2005; 5:21–27.
- [9] Fisher RS, Vickrey BG, Gibson, P., Hermann, B., Penovich, P., Scherer, A. et al, The impact of epilepsy from the patient's perspective I. Descriptions and subjective perceptions. *Epilepsy Res*. 2000; 41:39–51.
- [10] Ernst N, FH Lopes da Silva FS. *Electroencephalography: basic principles, clinical applications, and related fields*. Lippincott Williams & Wilkins, 2005.
- [11] Darvas, Felix, et al. "Mapping human brain function with MEG and EEG: methods and validation." *NeuroImage*, 2004; 23:S289-S299.
- [12] Acharya UR, Sree SV, Wapna G et al. Automated EEG analysis of epilepsy: A review. *Knowledge-based Systems*, 2013; 45:145-167.
- [13] Ball, Tonio, Kern, Markus, Mutschler, Isabella, Aertsen, Signal quality of simultaneously recorded invasive and non-invasive EEG. *NeuroImage*, 2009, 46(3): 708–716.
- [14] Yao, Dezhong. "A method to standardize a reference of scalp EEG recordings to a point at infinity." *Physiol Measur*, 2001; 22(4):693.
- [15] Homan RW, Herman J, Purdy P. Cerebral location of international 10–20 system electrode placement. *Electroencephalography Clin Neurophysiol*, 1987; 66(4):376–382.
- [16] [https://commons.wikimedia.org/wiki/File:21\\_electrodes\\_of\\_International\\_10-20\\_system\\_for\\_EEG.svg](https://commons.wikimedia.org/wiki/File:21_electrodes_of_International_10-20_system_for_EEG.svg).
- [17] Claudio, Pollo. The Future of Intracranial EEG Recording in Epilepsy: a Technological Issue ? *Epileptologie*, 2012, 29. 114-119
- [18] Andrzejak RG, Lehnertz K, Mormann F, Rieke C, David P, Elger CE. Indications of nonlinear deterministic and finite-dimensional structures in time series of brain electrical activity: Dependence on recording region and brain state. *Phys Rev*, 2001; 64(061907):1.
- [19] The Bonn EEG database, [http://epileptologie-bonn.de/cms/front\\_content.php?idcat=193&lang=3](http://epileptologie-bonn.de/cms/front_content.php?idcat=193&lang=3).
- [20] Cortes C, Vapnik V. Support vector networks," *Machine Learning*, 1995; 20: 273-297.
- [21] Sarhan AM. A novel gene-based cancer diagnosis with wavelets and support vector machines," *Eur J Sci Res*, 2010; 46(4): 488-502.
- [22] Crammer K, Singer Y. On the algorithmic of multiclass kernelbased vector machines. *J Machine Learning Res*, 2001; 2:265–292.
- [23] T. Chonavel, *Statistical Signal Processing*, Springer, New York, 2002.
- [24] Nikias CL, Petropulu AP. Higher-Order Spectra analysis. PTR Prentice Hall, New Jersey, 1993
- [25] Sarhan AM, Al-Helalat OI. Arabic Character Recognition using artificial neural networks and statistical analysis. *Int J Com Electrical, Automation, Control Infor Eng*, 2007; 1(3):506-510.
- [26] Amr II, Amin M, El-Kafrawy P, Sauber AM. Using Statistical moment invariants and entropy in image retrieval, *Int J Com Sci Infor Secu*, 20107; (1):160 -164.
- [27] Boveiri HR. On Pattern Classification Using Statistical Moments. *Int J Signal Proc Image Proc Pattern Recog*, 2010 ; 3(4):15-23.
- [28] The CH, Chin RT. On image analysis by the methods of moments. *IEEE Trans Pattern Anal Machine Intell*, 1988; 10:496-513.
- [29] Assi EB, Nguyen DK, Rihana S, Sawan M. Towards accurate prediction of epileptic seizures: A review. *Biomed Signal Proc Cont*, 2017; 34(1):144-157.
- [30] Alotaiby TN, Alshebeili SA, Alshawi T. EEG seizure detection and prediction algorithms: a survey. *EURASIP J Adv Signal Proc.*, 2014; 4:21-25.
- [31] Wei Z, Zou J, Zhang J, Chen L. Automatic recognition of epileptic discharges based on shape similarity in time-domain. *Biomed Sig Proc Cont*, 2017; 33(1):36-44.
- [32] Patidar S, Panigrahi T. Detection of epileptic seizure using Kraskov entropy applied on tunable-Q wavelet transform of EEG signals. *Biomedical Signal Processing and Control*, 34(1): 74–80, 2017.
- [33] A. K.Jaiswal and H. Banka, "Local pattern transformation based feature extraction techniques for classification of epileptic EEG signals," *Biomed Sig Proc Cont* 2017; 34(1):81–92.
- [34] Li M, Chen W, Zhang T. Automatic epileptic EEG detection using DT-CWT-based non-linear features," *Biomed Sig Proc Cont*, 2017; 34(1):114–125.
- [35] Ekong U, Lam HK, Ouyang G, Liu H, Chan KY, Ling SH. Classification of epilepsy seizure phase using interval type-2 fuzzy support vector machines," *Neurocomput*, 2016; 199:66-76.
- [36] Satapathy SK, Dehuri S, Jagadev AK. EEG signal classification using PSO trained RBF neural network for epilepsy identification," *Informatics Med Unlocked*, 2017; 6:1–11.
- [37] Riaz S, Rehman I, Niazi K, Dremstrup K. EMD-based temporal and spectral features for the classification of eeg signals using supervised learning. *IEEE Transactions Neural Sys Rehabil Eng*, 2016; 24(1): 8-35.
- [38] Dalton A, Patel S, Chowdhury AR, Welsh M, Pang T, Schachter S, O'laighin G, Bonato P. Development of a body sensor network to detect motor patterns of epileptic seizures," *IEEE Trans Biomed Eng*, 2012; 59(11):3204-3211.
- [39] Xie S, Krishnan S. Signal decomposition by multi-scale PCA and its applications to long-term EEG signal classification," *Proceedings of the IEEE International Conference on Complex Medical Engineering (Harbin Heilongjiang)*, 2011:532–537.
- [40] Faust O, Acharya UR, Adeli H, Adeli A. Wavelet-based EEG processing for computer-aided seizure detection and epilepsy diagnosis. *Seizure*, 2015; 26:56-64.
- [41] Ocak H. Automatic detection of epileptic seizures in EEG using discrete wavelet transform and approximate entropy. *Expert Syst Appl*. 2009; 36(2):2027–2036.
- [42] Guo L, Rivero D, Pazos A. Epileptic seizure detection using multiwavelet transform based approximate entropy and artificial neural networks, *J Neurosci Methods*, 2010; 193(1):156–63.
- [43] Chiu AWL, Daniel S, Khosravani H, Carlen PL, Bardakjian BL. Prediction of seizure onset in an in-vitro hippocampal slice model of epilepsy using Gaussian-based and wavelet-based artificial neural networks," *Ann Biomed Eng*, 2005; 33(6):798–810.
- [44] Guo L, Rivero D, Dorado J, Rabunal JR, Pazos A. Automatic epileptic seizure detection in EEGs based on line length feature and artificial neural networks. *J Neurosci Methods* 2010; 191(1):101–109.
- [45] Subasi A, Ismail GM. EEG signal classification using PCA, ICA, LDA and support vector machines. *Expert Syst Appl*, 2010; 37(12):8659–66.
- [46] Papadimitriou CH. Computational complexity. John Wiley and Sons Ltd., 2003.
- [47] Oded G. Computational complexity: A conceptual perspective." *ACM SIGACT News* 2008; 39(3):35-39.

- [48] Cooklev T. An efficient architecture for orthogonal wavelet transforms. *IEEE Signal Proc Lett*, 2006; 13(2).
- [49] Ortega A, Jiang W, Fernandez P, Chrysafis CG. Implementation of the discrete wavelet transform: complexity, memory, and parallelization issues, in: *Wavelet Applications in Signal and Image Processing VII*, Proceedings of the SPIE, Denver, Co, USA, 1999; 3813:386-400.
- [50] Daubechies I, Sweldens W. Factoring wavelet transforms into lifting steps. Technical Rep, Bell Laboratories, Lucent Technologies, 1996.
- [51] Olkkonen H, Olkkonen J T, Pesola P. Efficient lifting wavelet transform for microprocessor and vlsi applications. *IEEE Signal Proc Lett*, 2005; 12 (2).
- [52] Uzun, IS, Amira A. Real-time 2-D wavelet transform implementation for HDTV compression", *IEEE Real Time Imag*, 2005; 11(2):151-165.
- [53] Lipinski P. New algorithm for calculating wavelet transforms. *Systemics Cybernetics Inform*, 2009; 7(2):46- 50.
- [54] Orhan U, Hekim M, Ozer M. EEG signals classification using the K-means clustering and a multilayer perceptron neural network model. *Expert Syst Appl*, 2011; 38:13475,.
- [55] Guo D, Rivero J, Dorado C, Munteanu, Pazos A. Automatic feature extraction using genetic programming: An application to epileptic EEG classification. *Expert Syst Appl*, 2011; 38:104.
- [56] Ghosh-Dastidar S, Adeli H, Dadmehr N. Principal component analysis-enhanced cosine radial basis function neural network for robust epilepsy and seizure detection. *IEEE Trans Biomed Eng*, 2008; 55(2):512-8.
- [57] ED Ubeyli ED. Wavelet/mixture of experts' network structure for EEG classification. *Expert Syst Appl*, 2008; 37:1954.
- [58] Runarsson TP, Sigurdsson S. On-line detection of patient specific neonatal seizures using support vector machines and half-wave attribute histograms," *International Conference on Computational Intelligence for Modelling, Control and Automation, and International Conference on Intelligent Agents, Web Technologies and Internet Commerce (CIMCA-IAWTIC)* (Vienna), 2005; 673-677.
- [59] Chua KC, Chandran V, Acharya R, Lim CM. Automatic identification of epilepsy by HOS and power spectrum parameters using EEG signals: a comparative study. In *Proc. IEEE Eng Med Biol Soc*, 2008; 3824-3827
- [60] Zamir R. Detection of epileptic seizure in EEG signals using linear least squares preprocessing. *Comput Methods Programs Biomed* 2016; 133:95-109.
- [61] Ahammad N, Fathima T, Joseph P. Detection of Epileptic Seizure Event and Onset Using EEG. *Biomed Res Int*, 2014; 1:8.
- [62] Tsiouras TM, and Fotiadis D. Epileptic seizure detection in EEGs using time-frequency analysis. *IEEE Trans Infor Tech Biomed*, 2009; 13(5): 703-710.
- [63] Sharma R, Pachori RB. Classification of epileptic seizures in EEG signals based on phase space representation of intrinsic mode functions. *Expert Sys Appl*, 2015; 42(3):1106-1117.
- [64] Bashar MK, Reza F, Idris Z, Yoshida H. Epileptic seizure classification from intracranial EEG signals: A comparative study EEG-based seizure classification. *IEEE EMBS Conference on Biomedical Engineering and Sciences (IECBES)*, 2016.
- [65] Chen G, Xie W, Bui D Tian et al. Automatic Epileptic Seizure Detection in EEG Using Nonsampled Wavelet-Fourier Features. *J Med Biol Eng*, 2017; 37(1):123-131.